


口径-ポンプ型式

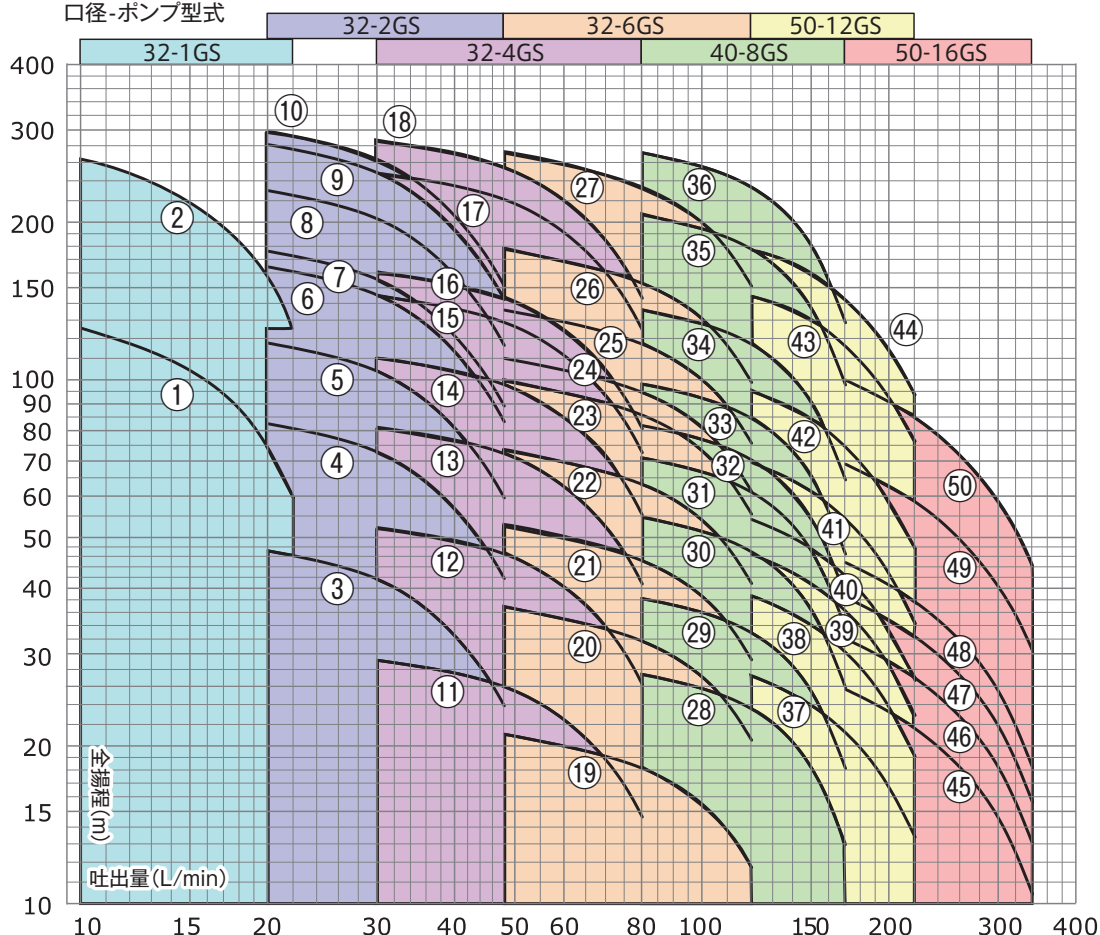

■仕様表 (井戸径100mm)

口径 A(mm)	羽根車 型式	選定 図	機種名	モータ (kW)	段数	標準仕様			最大外径 Max.dia. D(mm)	ポンプ L1(mm)	モータ L2(mm)	全長 L(mm)	質量 (kg)	
						吐出量 (L/min)	全揚程 (m)	全揚程 (m)						
32	1GS	1	OPD4-32-0.75-24	0.75	24	10	127	22	60	98	578	298	876	15.8
		2	OPD4-32-1.5-49	1.5	49	10	265	22	125		1068	346	1414	23.8
	2GS	3	OPD4-32-0.45-8	0.45	8	20	47	48	24		298	223	521	9.9
		4	OPD4-32-0.75-14	0.75	14	20	83	48	42		402	298	700	14.2
		5	OPD4-32-1.1-20	1.1	20	20	118	48	60		507	298	805	15.3
		6	OPD4-32-1.5-28	1.5	28	20	166	48	84		680	346	1026	19.1
		7	OPD4-32-1.9-30	1.9	30	20	178	48	90		712	389	1101	22.6
		8	OPD4-32-2.2-40	2.2	40	20	232	48	117		914	389	1303	25.1
		9	OPD4-32-2.7-49	2.7	49	20	285	48	144		1120	590	1710	33.7
		10	OPD4-32-3.7-52	3.7	52	20	301	48	153		1120	590	1710	34.2
4GS	11	OPD4-32-0.45-5	0.45	5	30	29	80	14.5	266	223	489	9.5		
	12	OPD4-32-0.75-9	0.75	9	30	52	80	26	352	298	650	13.5		
	13	OPD4-32-1.1-14	1.1	14	30	81	80	41	460	298	758	14.6		
	14	OPD4-32-1.5-19	1.5	19	30	111	80	55	568	346	914	17.7		
	15	OPD4-32-1.9-25	1.9	25	30	145	80	73	770	389	1159	22.4		
	16	OPD4-32-2.2-27	2.2	27	30	162	80	82	770	389	1159	22.6		
	17	OPD4-32-3.7-43	3.7	43	30	250	80	125	1140	590	1730	33.6		
	18	OPD4-32-5.5-48	5.5	48	30	287	80	144	1248	742	1990	41.8		
6GS	19	OPD4-32-0.45-4	0.45	4	48	21	120	12.5	297	223	520	9.8		
	20	OPD4-32-0.75-7	0.75	7	48	37	120	20	390	298	688	14.2		
	21	OPD4-32-1.1-10	1.1	10	48	52	120	29	485	298	783	15.1		
	22	OPD4-32-1.5-14	1.5	14	48	74	120	41	645	346	991	18.8		
	23	OPD4-32-1.9-19	1.9	19	48	100	120	56	862	389	1251	23.9		
	24	OPD4-32-2.2-21	2.2	21	48	110	120	62	862	389	1251	24.1		
	25	OPD4-32-2.7-26	2.7	26	48	137	120	76	1127	590	1717	33.5		
	26	OPD4-32-3.7-34	3.7	34	48	179	120	100	1282	590	1872	35.4		
	27	OPD4-32-5.5-52	5.5	52	48	274	120	152	1840	742	2582	48.3		
40	8GS	28	OPD4-40-0.75-5	0.75	5	80	27	170	13	98	348	298	646	13.8
		29	OPD4-40-1.1-7	1.1	7	80	38	170	18		410	298	708	14.4
		30	OPD4-40-1.5-10	1.5	10	80	55	170	26		503	346	849	17.3
		31	OPD4-40-1.9-13	1.9	13	80	71	170	34		665	389	1054	21.6
		32	OPD4-40-2.2-15	2.2	15	80	82	170	38		696	389	1085	21.9
		33	OPD4-40-2.7-18	2.7	18	80	98	170	47		851	590	1441	30.2
		34	OPD4-40-3.7-25	3.7	25	80	137	170	65		1016	590	1606	32.3
		35	OPD4-40-5.5-38	5.5	38	80	207	170	98		1467	742	2209	43.4
		36	OPD4-40-7.5-50	7.5	50	80	274	170	130		1799	818	2617	50.8
		50	12GS	37	OPD4-50-1.1-7	1.1	7	120	27		220	13.5	98	539
38	OPD4-50-1.5-10			1.5	10	120	39	220	19	695	346	1041		18.7
39	OPD4-50-1.9-12			1.9	12	120	46	220	23	940	389	1329		23.7
40	OPD4-50-2.2-14			2.2	14	120	54	220	27	940	389	1329		23.9
41	OPD4-50-2.7-18			2.7	18	120	70	220	34	1200	590	1790		33.2
42	OPD4-50-3.7-24			3.7	24	120	95	220	48	1474	590	2064		36.4
43	OPD4-50-5.5-35			5.5	35	120	145	220	76	2048	742	2790		48.8
44	OPD4-50-7.5-43			7.5	43	120	178	220	94	2464	818	3282		56.7
50	16GS	45	OPD4-50-1.5-8	1.5	8	170	25	340	10.5	98	681	346	1027	18.2
		46	OPD4-50-1.9-10	1.9	10	170	32	340	13		953	389	1342	23.3
		47	OPD4-50-2.2-12	2.2	12	170	38	340	15.5		953	389	1342	23.5
		48	OPD4-50-2.7-14	2.7	14	170	45	340	18		1088	590	1678	31.6
		49	OPD4-50-3.7-20	3.7	20	170	69	340	30		1540	590	2130	35.9
		50	OPD4-50-5.5-29	5.5	29	170	101	340	44		2163	742	2905	48.2

機種名説明(例) OPD4-32-0.75-24
 ① 機種(型式) ② ポンプ口径 ③ モータ出力 ④ 羽根車段数

注1) 口径規制も対応致します。
 注2) 7.5kWは400Vになります。
 注3) 全長はご使用のモータによって変わります。