
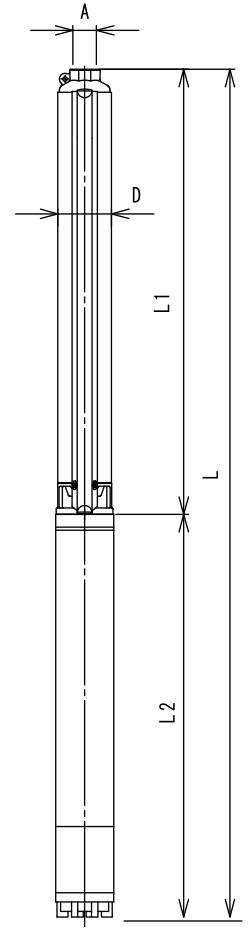


選定図 OPD4 (GS) 60Hz

口径-ポンプ型式

4 PRESS

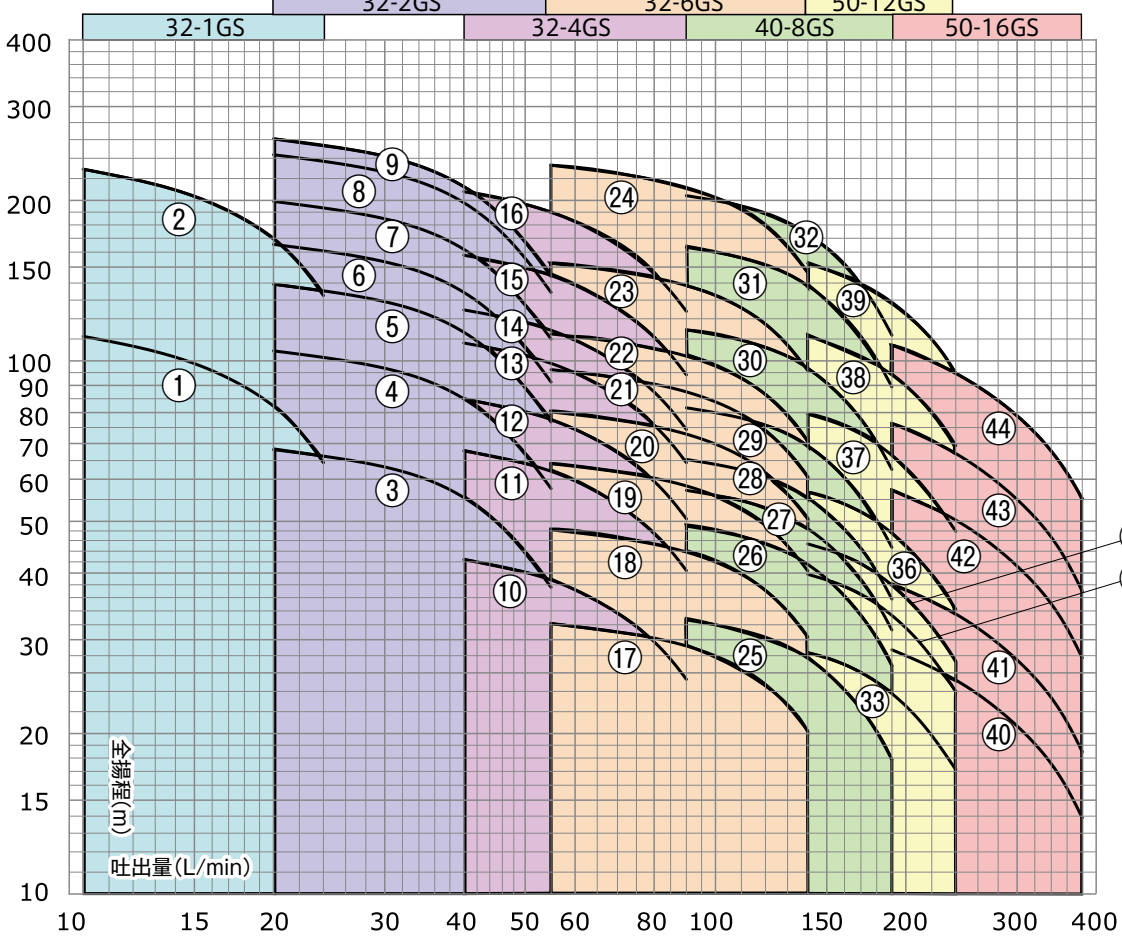

仕様表 (井戸径100mm)

口径 A(mm)	羽根車 型式	選 定 図	機種名	モータ (kW)	段数	標準仕様			最大外径 Max.dia. D(mm)	ポンプ L1(mm)	モータ L2(mm)	全長 L(mm)	質量 (kg)			
						吐出量 (L/min)	全揚程 (m)	全揚程 (m)								
32	1GS	1	OPD4-32-0.75-14	0.75	14	10	111	24	64	98	402	298	700	14.2		
			OPD4-32-1.5-28	1.5	28	10	227	24	132		677	346	1023	18.7		
			OPD4-32-3.0-56	3.0	56	10	454	24	264		1354	700	2046	37.4		
	2GS	3	OPD4-32-0.75-8	0.75	8	20	67	55	37		298	298	596	13.1		
			OPD4-32-1.1-12	1.1	12	20	103	55	57		402	298	700	14.0		
			OPD4-32-1.5-16	1.5	16	20	139	55	76		437	346	783	16.6		
			OPD4-32-1.9-19	1.9	19	20	165	55	91		507	389	896	20.2		
			OPD4-32-2.2-22	2.2	22	20	199	55	110		542	389	931	20.8		
			OPD4-32-2.7-28	2.7	28	20	242	55	135		680	590	1270	29.1		
			OPD4-32-3.7-30	3.7	30	20	260	55	145		712	590	1302	29.6		
			4GS	10	OPD4-32-0.75-5	0.75	5	40	42		90	25	266	298	564	12.7
					OPD4-32-1.1-8	1.1	8	40	67		90	40	352	298	650	13.3
	OPD4-32-1.5-10	1.5			10	40	84	90	50		374	346	720	15.8		
	OPD4-32-1.9-13	1.9			13	40	108	90	64		481	389	870	19.6		
	OPD4-32-2.2-15	2.2			15	40	124	90	74		481	389	870	19.8		
	OPD4-32-2.7-19	2.7			19	40	157	90	93		568	590	1158	27.7		
	6GS	17	OPD4-32-3.7-25	3.7	25	40	207	90	124		770	590	1360	29.4		
			OPD4-32-0.75-4	0.75	4	55	32	140	20		297	298	595	13.0		
			OPD4-32-1.1-6	1.1	6	55	48	140	30		359	298	657	13.6		
			OPD4-32-1.5-8	1.5	8	55	64	140	40		421	346	767	16.1		
			OPD4-32-1.9-10	1.9	10	55	80	140	50		485	389	874	20.1		
	40	8GS	25	OPD4-40-1.1-4	1.1	4	90	32	190		18	98	317	298	615	13.5
				OPD4-40-1.5-6	1.5	6	90	48	190		27		379	346	725	16.1
				OPD4-40-1.9-7	1.9	7	90	57	190		33		410	389	799	19.4
OPD4-40-2.2-8				2.2	8	90	65	190	36	441	389		830	19.7		
OPD4-40-2.7-10				2.7	10	90	81	190	44	503	590		1093	27.3		
OPD4-40-3.7-14				3.7	14	90	114	190	62	665	590		1255	28.7		
OPD4-40-5.5-20				5.5	20	90	162	190	89	851	742		1593	37.4		
OPD4-40-7.5-25				7.5	25	90	203	190	112	1006	818		1824	43.3		
12GS		33	OPD4-50-1.5-5	1.5	5	140	28	240	17	435	346		781	16.3		
			OPD4-50-1.9-7	1.9	7	140	39	240	24	539	389		928	20.3		
			OPD4-50-2.2-8	2.2	8	140	45	240	27	591	389		980	20.8		
			OPD4-50-2.7-10	2.7	10	140	56	240	34	695	590		1285	28.7		
			OPD4-50-3.7-14	3.7	14	140	79	240	47	940	590		1530	30.9		
			OPD4-50-5.5-19	5.5	19	140	111	240	68	1200	742		1942	40.3		
			OPD4-50-7.5-26	7.5	26	140	152	240	94	1581	818		2399	48.5		
			16GS	40	OPD4-50-2.2-6	2.2	6	190	28	380	14		545	389	934	20.1
					OPD4-50-2.7-8	2.7	8	190	38	380	18		681	590	1271	28.2
OPD4-50-3.7-12	3.7	12			190	57	380	28	953	590	1543	30.5				
OPD4-50-5.5-16	5.5	16			190	76	380	37	1224	742	1966	39.8				
50	44	OPD4-50-7.5-21	7.5	21	190	107	380	55	1619	818	2437	47.7				

注1) 口径規制も対応致します。
 注2) 7.5kWは400Vになります。
 注3) 全長はご使用のモータによって変わります。